


Static roller bar LG

Specifications

- Bars with static rollers (no lifting mechanism)
- Used to create die movement tracks outside the press
- Use as a track for heavy dies
- Use in the die loading or storage systems
- Max. operating temperature 160°C

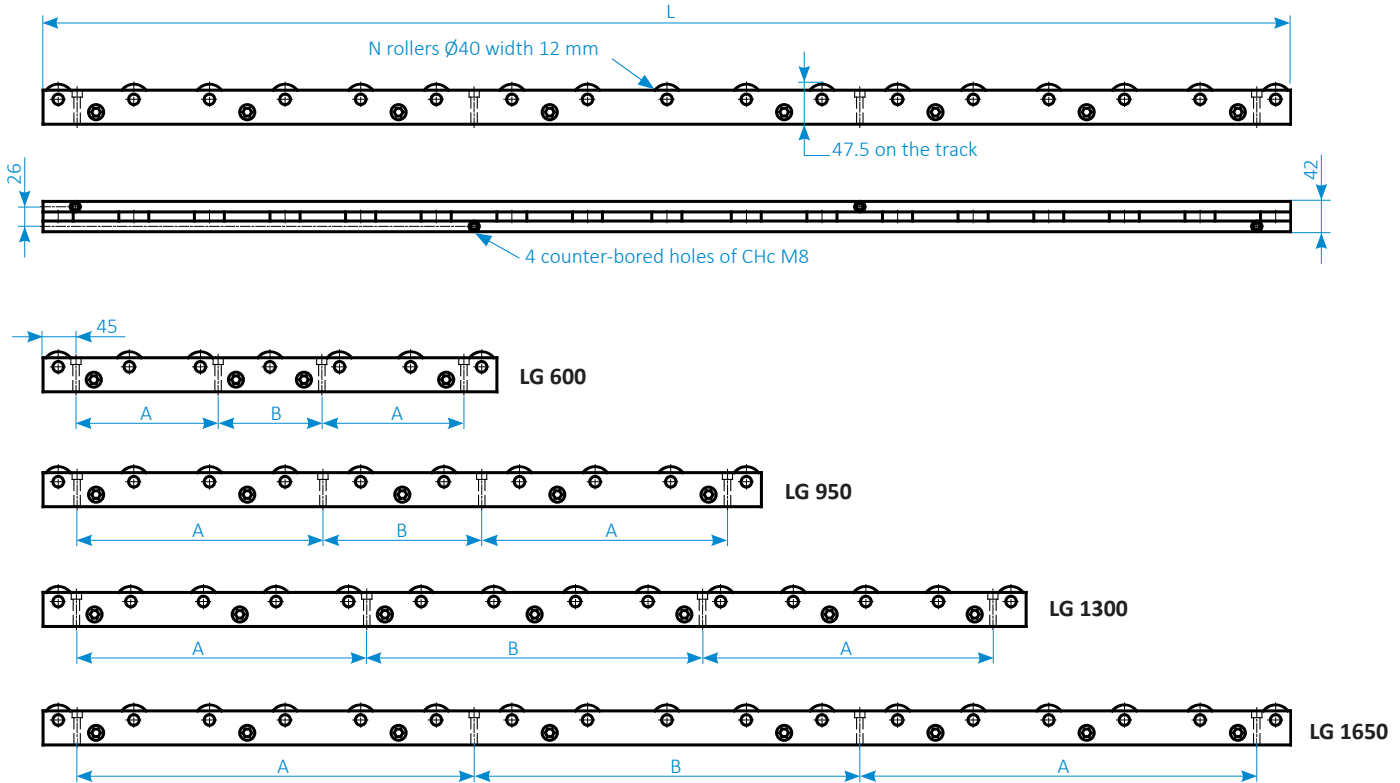

Specifications and dimensions


	LG 600	LG 950	LG 1300	LG 1650
Length (L - mm)	600	950	1300	1650
Capacity (kN)	21	30	42	51
Number of rollers (N)	7	10	14	17
Weight (kg)	6	9,5	13	16
A (mm)	186	325	383	525
B (mm)	138	210	444	510

To calculate the dynamic load for each roller, please refer to sheet 010-00.

Special dimensions and rollers for speeds in excess of 100 mm/sec on request.

All dimensions are in millimeters.

Purchase order reference

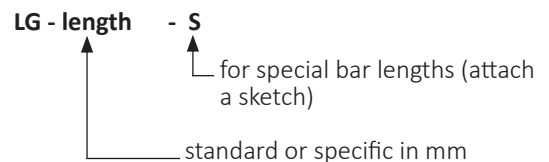

Examples : LG 950 (standard model)
LG 1000 S (specific model)

SERAPID France - Head Office

ZI Louis Delaporte, Zone Bleue, Voie F
F-76370 Rouxmesnil-Bouteilles | France
+33 (0)2 32 06 35 60
info-fr@serapid.com

SERAPID Ltd

Elm Farm Park, Great Green, Thurston,
Bury St Edmunds | IP31 3SH England
+44 (0)1359 233335
info-uk@serapid.com

SERAPID Deutschland GmbH

Wilhelm-Frank-Straße 30
D-97980 Bad Mergentheim | Germany
+49 (0)7931 9647-0
info-de@serapid.com

SERAPID USA INC.

34100 Mound Road
Sterling Heights MI 48310 | USA
+1 586 274 0774
info-us@serapid.com

SERAPID Singapore Pte Ltd

1 George Street #10-01
Singapore 049145 | Singapore
+65 9119 5890
info-sg@serapid.com