
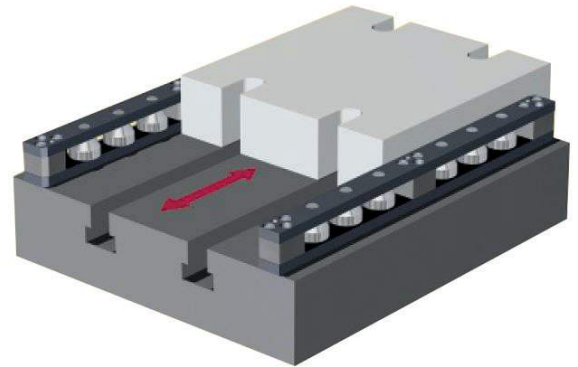


Lateral guiding bar LGGL

With vertical rollers

Specifications

- Directly mounted on the press
- The conical rollers are used to position the die from the top, using the gantry crane
- Precise guiding of the die in the press
- Simple and fast positioning
- Working temperature up to 160°C

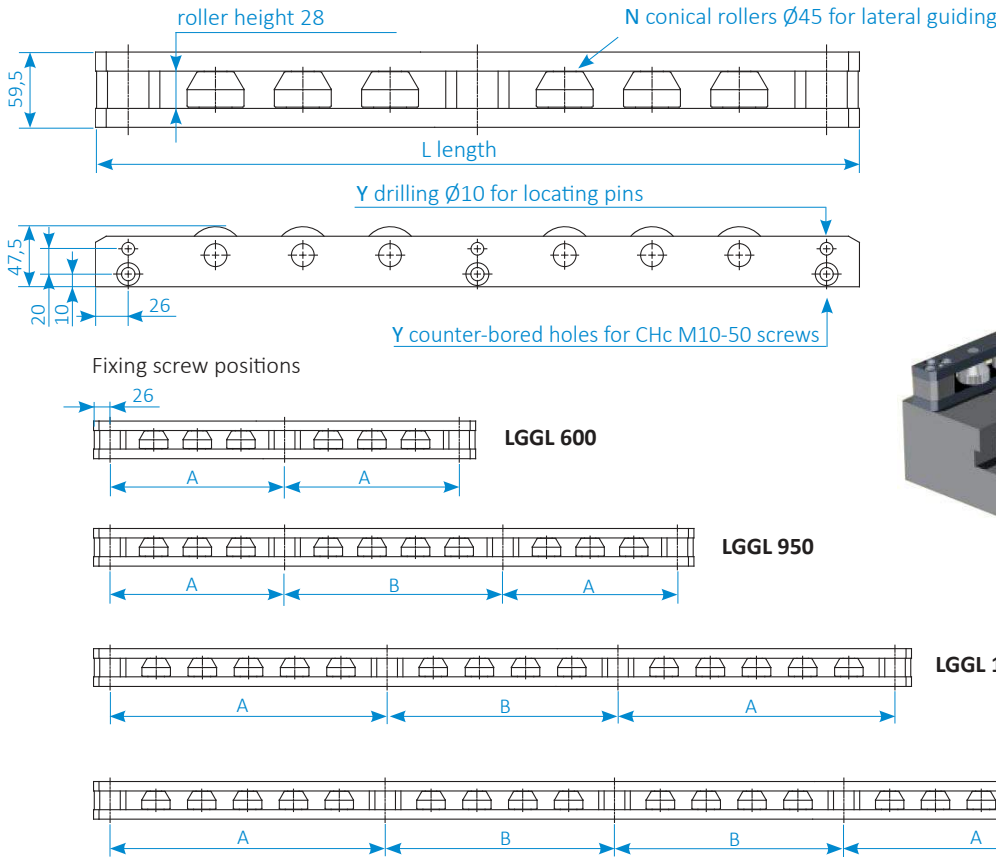

Specifications and dimensions

	LGGL 600	LGGL 950	LGGL 1300	LGGL 1650
Length (L - mm)	604	949	1293	1647
Weight (kg)	8	13	17	22
A (mm)	276	276	438	435
B (mm)	-	345	365	362,5
Number of rollers (N)	6	10	14	18
Number of holes (Y)	3	4	4	5

Special dimensions on request.
All dimensions are in millimeters.

Purchase order reference

LGGL - length - S
 ↑ for specific lengths, please attach a drawing
 ↑ standard or specific in mm

Examples : LGGL 950 (standard model)
 LGGL 1000 S (specific model)

SERAPID France
 +33 (0)2 32 06 35 60
 info-fr@serapid.com

SERAPID Deutschland GmbH
 +49 (0)7931 96 47-0
 info-de@serapid.com

SERAPID Ltd
 +44 (0)1359 233335
 info-uk@serapid.com

SERAPID INC.
 +1 586 274 0774
 info-us@serapid.com