


## Retractable ball cartridges, LC

### Specifications

- Used to create rolling surfaces of different sizes and shapes
- Built into the bolster, can be used when there is no available slot
- Adapted housing machined into the bolster or the sole of the die
- With spring washers
- Different sizes and capacities
- Specific sizes and shapes on request
- Standard working temperature of up to 70 °C, 160 °C with Viton seals

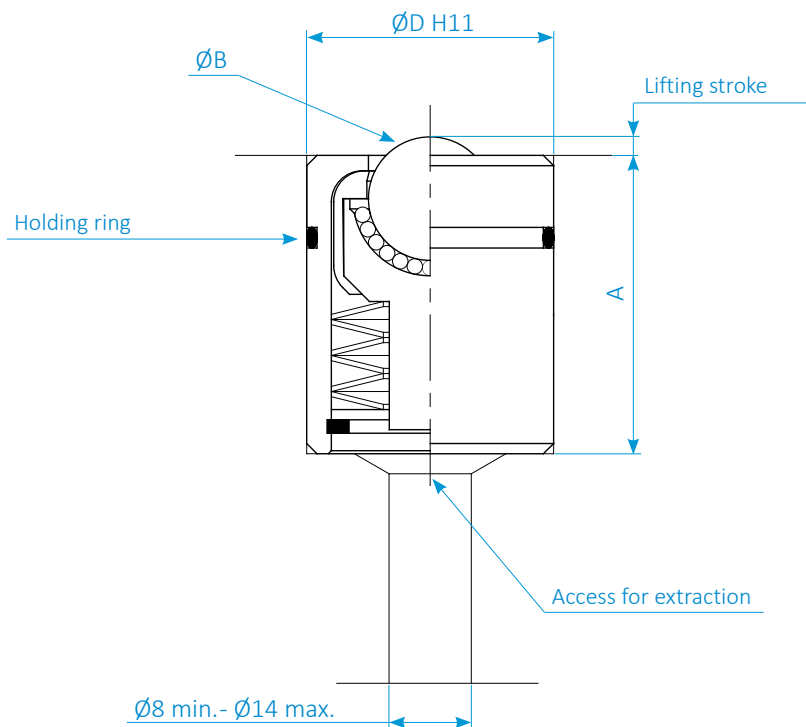

### Specifications and dimensions

	LC 30	LC 60	LC100	LC 16-60	LC 16-100
Force (kN)	0,3	0,6	1	0,6	1
A (mm)	29	29	29	34	34
Ø B (mm)	12	12	12	16	16
Stroke (mm)	1	1	1	2	2
Ø D (mm)	24	24	24	35	35

To calculate the allowable dynamic load for each ball, please refer to sheet 010-00.

All dimensions are in millimeters.

### Purchase order references

LC 30  
LC 60  
LC 100  
LC 16-60  
LC 16-100

SERAPID France  
+33 (0)2 32 06 35 60  
info-fr@serapid.com

SERAPID Deutschland GmbH  
+49 (0)7931 96 47-0  
info-de@serapid.com

SERAPID Ltd  
+44 (0)1359 233335  
info-uk@serapid.com

SERAPID INC.  
+1 586 274 0774  
info-us@serapid.com